

## 24 Channel 1080P 1.5U 4HDD TVI Tribrid DVR



### Main Features:

- Connectable to TVI and analog cameras;
- Connectable to the Coaxitron camera/dome with long transmission distance;
- Connectable to network cameras;
- Simultaneous HDMI and VGA outputs at up to 1920×1080P resolution.
- New GUI and supports starting record with one key;
- Redundant recording, holiday recording schedule configuration;
- Instant playback for assigned camera during multi-channel live view mode;
- Support up to 24-ch synchronous playback; and reverse playback for multi-channel;
- Smart playback to go through less effective information;
- Manual video quality diagnostics;
- Support VCA alarm (line crossing detection and intrusion detection);
- Customization of tags, searching and playing back by tags;
- Locking and unlocking record files;
- Support HDD quota and group management; different capacity can be assigned to different cameras under quota mode;
- Provide 4 SATA interfaces and 1 eSATA interface for record and backup;
- 1 self-adaptive 10M/100M/1000M network interface;
- Support access by EZVIZ Cloud P2P;
- Support DDNS (Dynamic Domain Name System);
- Network detection function.

## 24 Channel 1080P 1.5U 4HDD TVI Tribrid DVR

### Specifications:


<b>Model</b>		SS-T5D-24
<b>Video/ Audio input</b>	<b>Video compression</b>	H.264
	<b>Analog and HD-TVI video input</b>	24-ch
		BNC interface (1.0Vp-p, 75 Ω)
	<b>Supported camera types</b>	720P/25, 720P/30, 720P/50, 720P/60, 1080P/25, 1080P/30, CVBS
	<b>IP video input</b>	8-ch (up to 24-ch)
		Up to 2MP resolution
	<b>Audio compression</b>	G.711u
<b>Video/ Audio output</b>	<b>Audio input</b>	4-ch, RCA (2.0 Vp-p, 1 KΩ)
	<b>Two-way audio in</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)
	<b>HDMI / VGA output</b>	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
	<b>Encoding resolution</b>	Main stream: 1080P (non-real-time) / 720P / WD1 / VGA / 4CIF / CIF
		Sub-stream: WD1 (non-real-time) / 4CIF(non-real-time) / CIF / QCIF / QVGA
	<b>Frame rate</b>	Main stream: 1/16 fps ~ Real time frame rate
		Sub-stream: 1/16 fps ~ Real time frame rate
	<b>Video bitrate</b>	32 Kbps-6 Mbps
	<b>Audio output</b>	1-ch, RCA (Linear, 1KΩ)
	<b>Audio bitrate</b>	64 Kbps
	<b>Dual-stream</b>	Support
	<b>Stream type</b>	Video, Video & Audio
<b>Network management</b>	<b>Synchronous playback</b>	24-ch
	<b>Playback resolution</b>	1080P / 720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF
<b>Hard disk</b>	<b>Remote connection</b>	128
	<b>Network protocols</b>	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
<b>External interface</b>	<b>Type</b>	4 SATA interfaces for 4 HDDs; 1 eSATA interface
	<b>Capacity</b>	Up to 4 TB capacity for each disk
	<b>Network interface</b>	1; 10M / 100M / 1000M self-adaptive Ethernet interface
	<b>Serial interface</b>	RS-232, RS-485, Keyboard
<b>General</b>	<b>USB port</b>	3 × USB2.0
	<b>Alarm in / out</b>	16 / 4
	<b>Power supply</b>	100 ~ 240VAC, 47 ~ 63HZ
	<b>Consumption (without hard disks)</b>	≤ 65W
	<b>Working temperature</b>	-10 °C ~ +55 °C (14 °F ~ 131 °F)
	<b>Working humidity</b>	10% ~ 90%
	<b>Chassis</b>	19-inch rack-mounted 1.5U chassis
<b>General</b>	<b>Dimensions (W × D × H)</b>	445 × 390 × 70 mm (17.5 × 15.3 × 2.7 inch)
	<b>Weight (without hard disks)</b>	≤ 5Kg (11.0lb)

# SS-T5D-24



## 24 Channel 1080P 1.5U 4HDD TVI Tribrid DVR

### Physical Interfaces:

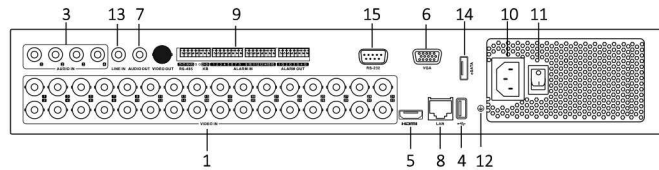

Index	Name
1	VIDEO IN
3	AUDIO IN, RCA Connector
4	USB Port
5	HDMI Interface
6	VGA Interface
7	VGA AUDIO OUT
8	LAN Network Interface
9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
10	100~240V AC Power Input
11	Power Switch
12	GND
13	LINE IN
14	eSATA Interface
15	RS-232 Serial Port

### Typical Application:

